

# Your Reliable Energy Solution Partner

2023



5th floor, A Zone Of Building 11  
Hengchangrong High-Tech Industrial Park  
Huangtian Community, Hangcheng Street, Bao'an District,  
Shenzhen, China, 518100



+86 0755 8520 9056  
[www.luxpowertek.com](http://www.luxpowertek.com)  
[info@luxpowertek.com](mailto:info@luxpowertek.com)

BR-EM-23-02



" There are over **200,000+**

Luxpower systems installed worldwide in various scenarios, including hybrid, off-grid, AC coupling, and DC coupling. We are dedicated to assisting our users in utilizing the energy from the sun and improving their quality of life."



**HYBRID SERIES**

**Single Phase**

- LXP 3k-6k P04
- LXP-LB-EU 8-10k P06
- LXP-LB-EU 12k P08
- LXP-LB-EU 6-8k P10



**HYBRID SERIES**

**Split Phase**

- LXP-LB-US 8-10k P12
- LXP-LB-US 12k P14



**HYBRID SERIES**

**Three Phase**

- TriP 6-20k P16



**ECO HYBRID**

- SNA 3-6k Single Phase P22
- SNA 5-6k Split Phase P24



**AC/DC RETROFIT**

- ACS 3600 P28
- SQPOD 3600 P30
- LSP 100k P32



**MONITORING**

**APP/WEB P34**



LU<sup>X</sup>POWER<sup>TEK</sup>

# HYBRID SERIES

- Single Phase

LXP 3-6k

LXP-LB-EU 8-10k

LXP-LB-EU 12k

LXP-LB-EU 6-8k

- Split Phase

LXP-LB-US 8-10k

LXP-LB-US 12k

- Three Phase

TriP 6-20k

# HYBRID SERIES

## Intelligent working modes

- Weather Compensation and Smart Octopus charging packages
- Self consumption mode for high tariff areas
- Charge priority mode for areas where grid power is unstable
- Force charge & discharge mode for variable tariff integration

## Smart EPS (Emergency Power Supply)

- Plug & Play integrated changeover, seamless switching under 20ms
- Auto backup power for critical load emergency supply

## Intelligent Battery Integration

- Remote upgrade for battery management system (BMS) firmware
- Wide range of compatible battery brands
- Auto 'wake-up' function of lithium battery from sleep mode
- Essential info uploaded to Lux server for quick ESS diagnosis
- Battery sharing with multi-inverters in single phase or three phase

## Advanced Parallel Units (Parallel Versions)

- Up to 10 units parallel
- Single phase and unbalanced three phase paralleling

## Key Features

- High PV input values
- High charge/discharge rates
- Light, fast & easy installation
- Free Wi-fi monitoring on mobile&PC
- Multi-phase output on different hybrid models
- Generator interface available



# HYBRID SERIES

## Single Phase

# LXP 3-6k

LU POWER<sup>TEK</sup>



- Single phase/Unbalanced 3-Phase
- Support up to 10pcs in parallel
- Intelligent charge features
  - Weather forecast compensation
  - Update electricity price automatically
  - Economize charging/discharging schedule automatically
- Unique monitoring platform
  - Free APPs on smartphone (Android/iOS) & PC (Web)
- Integrated UPS module
  - On/off grid seamless switching under 20ms
- Wide battery compatible list
- Plug & Play (AC and PV port)

## SpecifiCation

INPUT (PV DC)	LXP 3000W	LXP 3600W	LXP 4000W	LXP 4600W	LXP 5000W	LXP 6000W
Max. PV array power(W)	6600	7000	7000	8000	8000	8000
Rated PV input voltage(V)	360					
Number of independent MPPT inputs	2					
PV input voltage range(V)	100 550					
MPPT voltage range(V)	120 500					
Start-up voltage(V)	140					
Max. PV input current per MPPT(A)	13					
Max. PV short-circuit current input per MPPT(A)	20					
<b>Battery</b>						
Compatible battery type	Lithium-ion/Lead-Acid					
Rated battery voltage(V)	48					
Battery voltage range(V)	48 60					
Max. charging voltage(V)	60					
Max. charging/discharging current(A)	66				80	
Max. charging/discharging power(W)	3600				4000	
Force wake up battery from PV function	YES					
<b>Grid</b>						
Rated AC voltage(V)	230					
Rated AC frequency(HZ)	50/60					
Rated AC output current(A)	13	15.6	17.4	20	21.7	26
Rated AC output power(W)	3000	3600	4000	4600	5000	6000
Max. AC input current(A)	31.3	31.3	31.3	34.7	34.7	34.7
Max. AC input power(W)	7200				8000	
PF	0.99(Adjustable from 0.8 leading to 0.8 lagging)					
THDI	<3%					
Rated AC current of BYPASS relays(A)	40					
<b>UPS</b>						
Rated output power with Solar(W)	3000	3600	4000	4600	5000	6000
Rated output power without Solar(W)	3000	3600	4000	4000	4000	4000
Rated output voltage(V)	230					
Rated output current(A)						17.4
Rated output frequency(Hz)	50/60					
Surge power, duration	4500W, 30S					
Switching time(UPS)	20ms					
Wave form	Sine wave					
THDV	<5%					
<b>Efficiency</b>						
Max. MPPT efficiency	99.0%					
Max. efficiency	97.3%					
EU efficiency	97.0%					
Max. charging efficiency	94.5%					
Max. discharging efficiency	94.5%					
<b>Protection</b>						
Over current/voltage protection	YES					
Anti-islanding protection	YES					
AC Short-circuit current protection	YES					
Leakage current protection	YES					
Ground fault monitoring	YES					
Grid monitoring	YES					
DC switch	YES					
DC surge protection Type III	YES					
AC surge protection Type III	YES					
<b>General</b>						
Dimensions(W*H*D)	455*565*181mm/17.9*22.2*7.1inch					
Weight	20kg/44.1lbs					
Ingress protection rating	IP65					
Operating environment temperature range	-25 60°C					
Storage temperature range	-40 65°C					
Relative humidity	0 95%					
Display & Communication interface	LCD, RS485/Wi-Fi/CAN					
Warranty	5 years					
Cooling method	Natural					
Topology	Transformer-less					
Altitude	2000m					
Noise emission(typical)	<25dB					
<b>Standards &amp; Certification</b>						
IEC 62109-1/2, IEC 62040, IEC 62477, EN 61000, IEC 60068, EN 62920, AS4777.2, NRS 097, EN 50549, RD1699, RD413, RD647, UNE 217001, NTS TYPE A, CEIO-21, CEIO-16, VDE-AR-N 4105, UTE C15-712-1/XP C15-712-3/VFR 2019, G98, G99						



# HYBRID SERIES

## Single Phase

# LXP-LB-EU 8-10k

- Max. 210A charge/discharge current
- Support up to 10pcs in parallel
- AC coupling function
- Smart load control
- Separate generator interface available
- Easy to use with batteries
- Color touch LCD, IP65



## SpecifiCation

INPUT (PV DC)	LXP-LB-EU 8K	LXP-LB-EU 10K
Max. PV array power(W)	12000	15000
Rated PV input voltage(V)		360
Number of independent MPPT inputs		2
PV input voltage range(V)		100 600
MPPT voltage range(V)		120 480
Start-up voltage(V)		140
Max. PV input current per MPPT(A)		25/25
Max. PV short-circuit current input per MPPT(A)		31/31
<b>Battery</b>		
Compatible battery type	Lithium-ion/Lead-Acid	
Rated battery voltage(Lithium-ion/Lead-Acid)(V)	48	
Battery voltage range(V)	40 60	
Max. charging/discharging current(A)	167	210
Max. charging/discharging power(W)	8000	10000
Force wake up battery from PV function	YES	
<b>Grid</b>		
Rated AC voltage(V)	230	
Rated AC frequency(Hz)	50	
Rated AC output current(A)	34.8	43.5
Rated AC output power(W)	8000	10000
Max. AC input current(A)	70	90
Max. AC input power(W)	16100	20700
PF	0.99	
THDI	<3%	
Rated AC current of BYPASS relays(A)	90	
<b>UPS</b>		
Rated output power(W)	8000	10000
Rated output voltage(V)	230	
Rated output current(A)	34.8	43.5
Rated output frequency(Hz)	50/60	
Surge power, duration	2Pn, 0.5s	
Switching time	20ms	
Wave form	Sine wave	
THDV	<3%	
<b>Efficiency</b>		
Max. MPPT efficiency	99.0%	
Max. efficiency	99.0%	
EU efficiency	97.5%	
Max. charging efficiency	96.0%	
Max. discharging efficiency	94.0%	
<b>Protection</b>		
PV reverse polarity protection	YES	
Over current/voltage protection	YES	
Anti-islanding protection	YES	
AC Short-circuit current protection	YES	
Leakage current protection	YES	
Ground fault monitoring	YES	
Grid monitoring	YES	
DC switch	YES	
AC/DC surge protection Type III	YES	
<b>General</b>		
Dimensions(W*H*D)	490*580*265mm/19.3*22.8*10.4inch	
Weight	45kg/99.2lbs	
Ingress protection rating	IP65	
Relative humidity	0 100%	
Operating environment temperature range	-25 60°C	
Storage temperature range	-25 60°C	
Display & Communication interface	Touch color screen, RS485/Wifi/CAN	
Warranty	5 years	
Cooling method	FAN	
Topology	Transformer-less	
Altitude	<2000m	
Noise emission(typical)	<50dB	
<b>Standards &amp; Certification</b>		
EU Version NRS 097		



# HYBRID SERIES

## Single Phase

# LXP-LB-EU 12k




- Max. 250A charge/discharge current with 48V battery
- Support up to 10pcs in parallel
- AC coupling function
- Smart load control
- Separate generator interface available
- 12kW UPS output
- 3 MPPT inputs, maximum up to 18 kW
- Integrated UPS module, on/off grid seamless
- LCD color touch screen



## SpecifiCation

INPUT (PV DC)	LXP-LB-EU 12K
Max. PV array power(W)	18000
Reted PV input voltage(V)	360
Number of independent MPPT inputs	3
PV input voltage range(V)	100 600
MPPT voltage range(V)	120 480
Start-up voltage(V)	140
Max. PV input current per MPPT(A)	25/15/15
Max. PV short-circuit current input per MPPT(A)	31/19/19
Battery	
Compatible battery type	Lithium-ion/Lead-Acid
Rated battery voltage(Lithium-ion/Lead-Acid)(V)	48
Battery voltage range(V)	40 60
Max. charging/discharging current(A)	250
Max. charging power(W)	12000
Force wake up battery from PV function(Y/N)	Y
Grid	
Rated AC voltage(V)	230
Rated AC frequency(Hz)	50
Rated AC output current(A)	50
Rated AC output power(W)	11500
Max. AC input current(A)	100
Max. AC input power(W)	23000
PF	0.99
THDI	<3%
Rated AC current of BYPASS relays(A)	200
UPS	
Rated output power(W)	11500
Rated output voltage(V)	230
Rated output current(A)	50
Rated output frequency(Hz)	50/60
Surge power, duration	2Pn, 0.5s
Switching time	20ms
Wave form	Sine wave
THDV	3%
Efficiency	
Max. MPPT efficiency	99.0%
Max. efficiency	99.0%
EU efficiency	97.5%
Max. charging efficiency	96.0%
Max. discharging efficiency	94.0%
Protection	
PV reverse polarity protection	YES
Over current/voltage protection	YES
Anti-islanding protection	YES
AC Short-circuit current protection	YES
Leakage current protection	YES
Ground fault monitoring	YES
Grid monitoring	YES
DC Switch	YES
AC/DC Surge protection Type III	YES
General	
Dimensions(W*H*D)	490*670*265mm/19.3*26.3*10.4inch
Weight	50kg/110.2lbs
Ingress protection rating	IP65
Relative humidity	0 100%
Operating environment temperature range	-25 60°C
Storage temperature range	-25 60°C
Display & Communication interface	Touch color screen, RS485/Wi-Fi/CAN
Warranty	5 years
Cooling method	FAN
Topology	Transformer-less
Altitude	<2000m
Noise emission(typical)	<50dB
Standards & Certification	
EU Version NRS O97	

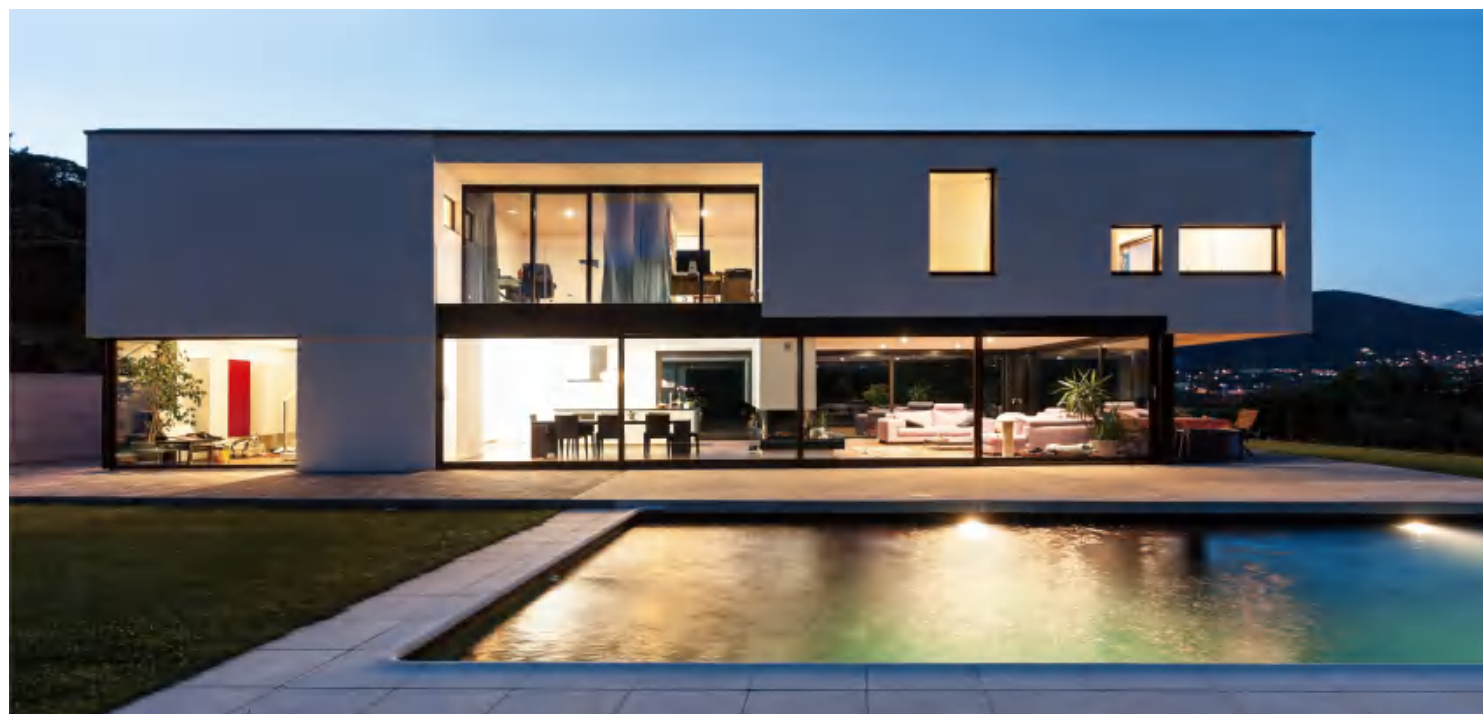



# HYBRID SERIES

## Single Phase

# LXP-LB-EU 6k/7k/8k

- Charging/discharging current can reach up to 166A.
- Upgrade to 2 sets of battery terminals for connecting wires
- Touch screen/Color LCD
- Integrated UPS function
- AC coupling function
- Support up to 10pcs in parallel
- Support single phase connected in parallel to three-phase
- Separate generator port available



## SpecifiCation

Input DC (PV Side)	LXP-LB-EU 6K	LXP-LB-EU 7K	LXP-LB-EU 8K
Max. DC input power for single MPPT(W)	5000/5000	6000/6000	6000/6000
Max. PV array power(W)	10000	12000	12000
PV input voltage range(V)		100 600	
Rated PV input voltage(V)		360	
MPPT voltage range(V)		120 500	
Full Power MPPT Voltage Range		190 480	
Start-up voltage(V)		140	
Max. PV input current per MPPT(A)	17/17	26/26	26/26
Number of independent MPPT inputs		2(A:2/B:2)	
<b>Battery</b>			
Compatible Battery Type	Lithium-ion, Lead-acid		
Rated battery voltage(Lithium-ion/Lead-Acid)(V)	48		
Battery voltage range(V)	40 60		
Recommend capacity of battery per inverter	2 60kWh		
Max. charging/discharging current(A)	125/125	146/146	166/166
Max. charging/discharging power(W)	6000	7000	8000
<b>Grid</b>			
Rated power(W)	6000	7000	8000
Rated AC voltage(V)	230		
Operating voltage range(V)	180 270		
Max. continuous AC current	26A	32A	34.8A
Rated AC frequency(Hz)	50/60		
THDI	<3%		
PF	-0.8 +0.8 adjustable		
<b>UPS Output - with Battery</b>			
Rated output power(W)	6000	7000	8000
Rated output voltage(V)	230		
Rated output frequency(Hz)	50/60		
UPS nominal output current	26A	32A	30.5A
Peak Power	2xPn, <0.5s		
THDV	<3%		
Switching Time	<20ms		
<b>Efficiency</b>			
Max. MPPT efficiency	99.9%		
Max. efficiency	97.5%		
<b>Protection</b>			
Anti-islanding protection	YES		
AC Short-circuit protection	YES		
Leakage current protection	YES		
Grid monitoring	YES		
PV DC switch	YES		
Ingress protect degree	IP65		
PV insulation detection	YES		
Over current protection	YES		
Over voltage protection	YES		
Battery soft start protection	YES		
SPD protection	YES		
PV reverse polarity protection	YES		
<b>General</b>			
Dimensions(mm)	TBD		
Weight	TBD		
Display & communication	Touched Color LCD, RS485/Wi-Fi/CAN		
Topology	Transformer-less		
Ambient temperature range	-25 60°C		
Standby losses	<15W		
Cooling method	Natural		
Relative humidity	0 100%		
Max. operating altitude	2000m		
Noise emission (typical)	<25dB		
Warranty	5 Years		
<b>Standards &amp; Certification</b>			



# HYBRID SERIES


## Split Phase

# LXP-LB-US 8-10k



Your Reliable Energy Solution Partner

- Easy to use with batteries
- AC coupling function
- Peak shaving function
- Breakers (AC, Gen Load and battery) are integrated
- Support up to 10pcs in parallel
- Smart load control
- Separate generator interface available
- Plug & Play, seamless switching under 20ms
- LCD color touch screen

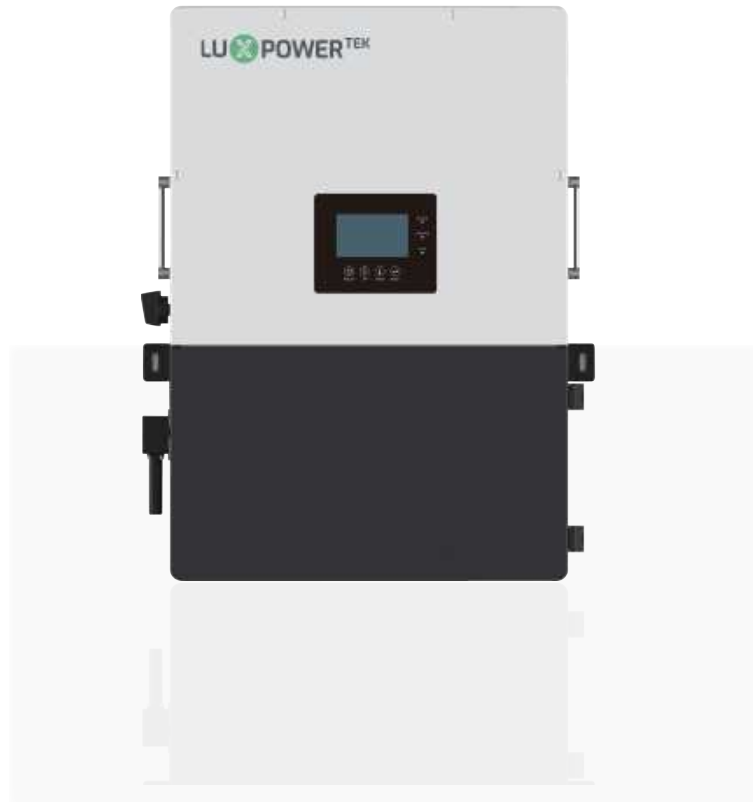

## SpecifiCation

INPUT (PV DC)	LXP-LB-US 8K	LXP-LB-US 10K
Max. PV array power(W)	12000	15000
Rated PV input voltage(V)		360
Number of independent MPPT inputs		2/2
PV input voltage range(V)		100 600
MPPT voltage range(V)		170 500
Start-up voltage(V)		140
Max. PV input current per MPPT(A)		25/25
Max. PV short-circuit current input per MPPT(A)		31/31
<b>Battery</b>		
Compatible battery type	Lithium-ion/Lead-Acid	
Rated battery voltage(V)	48	
Battery voltage range(V)	40 60	
Max. charging/discharging current(A)	167	210
Max. charging/discharging power(W)	8000	10000
Force wake up battery from PV function	YES	
<b>Grid</b>		
Rated AC voltage(V)	120/240; 120/208	
Rated AC frequency(Hz)	60	
Rated AC output current	33.3A@240V/38.5A@208V	41.6A@240V/48A@208V
Rated AC output power(W)	8000	10000
Max. AC input current(A)	66	80
Max. AC input power(W)	16000	20000
PF	99.0%	
THDI	3%	
Rated AC current of BYPASS relays(A)	90	
<b>UPS</b>		
Rated output power(W)	8000	10000
Rated output voltage(V)	120/240; 120/208	
Rated output current	33.3A@240V/38.5A@208V	41.6A@240V/48A@208V
Rated output frequency(Hz)	60	
Surge power, duration	2Pn, 0.5S	
Switching time	20ms	
Wave form	Sine wave	
THDV	<3%	
<b>Efficiency</b>		
Max. MPPT efficiency	99.9%	
Max. efficiency	97.5%	
Battery charging/discharging efficiency	95.0%	
CEC efficiency	96.4%	
<b>Protection</b>		
PV reverse polarity protection	YES	
Over current/voltage protection	YES	
Anti-islanding protection	YES	
AC short-circuit protection	YES	
Leakage current protection	YES	
DC switch	YES	
AC/DC surge protection Type III	YES	
Rapid shut down	YES	
Grid/AFCI/RSD monitoring	YES	
AC switch(Current/Voltage)	63A/480VAC	
UPS switch(Current/Voltage)	63A/480VAC	
Battery switch(Current/Voltage)	250A/80VDC	
<b>General</b>		
Dimensions(W*H*D)	520*750*285mm/20.5*29.5*11.2inch	
Weight	50kg/110lbs	
Ingress protection rating	IP65/ NAME 4X	
Relative humidity	0 100%	
Operating environment temperature range	-25 60°C	
Storage temperature range	-25 60°C	
Display & Communication interface	Touch color screen, RS485/Wi-Fi/CAN	
Warranty	5 years	
Cooling method	FAN	
Topology	Transformer-less	
Altitude	<2000m	
Noise emission (typical)	<50dB	
<b>Standards &amp; Certification</b>		
UL 1741: 2021, CSA C22.2#1071:2016, CSA C22.2#330:2017, IEEE1547:2018, HECO SRD, IEEE-1547.1:2020, CEC, FCC SDOC, NEC Section 690.12 E5000, SA1718		





# HYBRID SERIES

## Split Phase

# LXP-LB-US 12k

- AC coupling function
- Peak shaving function
- Smart load control
- Support up to 10pcs in parallel
- 12kW UPS output split phase
- LCD color touch screen
- 3 MPPT inputs, maximum up to 18 kW
- Breakers (Load and battery) are integrated
- 200A AC bypass current
- Separate generator interface available
- Integrated UPS module, on/off grid seamless switching under 20ms



## SpecifiCation

INPUT (PV DC)	LXP-LB-US 12K
Max. PV array power(W)	18000
Rated PV input voltage(V)	360
Number of independent MPPT inputs	3
PV input voltage range(V)	100 600
MPPT voltage range(V)	120 480
Start-up voltage(V)	140
Max. PV input current per MPPT(A)	25/15/15
Max. PV short-circuit current input per MPPT(A)	31/19/19
Battery	
Compatible battery type	Lithium-ion/Lead-Acid
Rated battery voltage(V)	48
Battery voltage range(V)	40 60
Max. charging/discharging current(A)	250
Max. charging/discharging power(W)	12000
Force wake up battery from PV function	YES
Grid	
Rated AC voltage(V)	120/240; 120/208
Rated AC frequency(Hz)	60
Rated AC output current(A)	50
Rated AC output power(W)	12000
Max. AC input current(A)	100
Max. AC input power(W)	24000
PF	0.99
THDI	<3%
Rated AC current of BYPASS relays(A)	200
UPS	
Rated output power(W)	12000
Rated output voltage(V)	120/240; 120/208
Rated output current(A)	50
Rated output frequency(Hz)	60
Surge power, duration	2Pn, 0.5S
Switching time	20ms
Wave form	Sine wave
THDV	<3%
Efficiency	
Max. MPPT efficiency	99.9%
Max. efficiency	97.5%
Battery charging/discharging efficiency	95.0%
CEC efficiency	96.9%
Protection	
PV reverse polarity protection	YES
Over current/voltage protection	YES
Anti-islanding protection	YES
AC Short-circuit protection	YES
Leakage current protection	YES
DC switch	YES
AC/DC surge protection Type III	YES
Rapid shut down	YES
Grid/AFCI/RSD monitoring	YES
UPS switch(Current/Voltage)	200A/250V
Battery switch(Current/Voltage)	2*200A/80V
General	
Dimensions(W*H*D)	520*870*285mm/20.5*34.2*11.2inch
Weight	55kg/121.2lbs
Ingress protection rating	IP65/ NAME 4X
Relative humidity	0 100%
Operating environment temperature range	-25 60°C
Storage temperature range	-25 60°C
Display & Communication interface	Touch color screen, RS485/Wi-Fi/CAN
Warranty	5 years
Cooling method	FAN
Topology	Transformer-less
Altitude	<2000m
Noise emission(typical)	<50dB
Standards & Certification	
UL 1741: 2021, CSA C22.2#1071:2016, CSA C22.2#330:2017, IEEE1547:2018, HECO SRD, IEEE-15471:2020, CEC, FCC SDOC, NEC Section 690.12 E5000, SA1718	



# HYBRID SERIES

## Three Phase

# TriP 6-20k

- Maximum input current 40A for each MPPT
- Maximum 3 MPPT inputs (2 ports for each MPPT)
- High battery voltage ranges from 160 to 700V
- High battery charging/discharging current of 50A
- 20kW UPS output
- 10 seconds double overload current available
- AC coupling function
- Support up to 10 pcs in parallel
- Support unbalanced load



**New TriP, New Journey  
3-Phase Solution**



## SpecifiCation

INPUT (PV DC)	TriP 6K	TriP 8K	TriP 10K	TriP 12K	TriP 15K	TriP 20K
Max. PV array power(W)	9000	12000	15000	18000	22500	30000
Rated PV input voltage(V)	650					
Number of independent MPPT inputs	2			3		
PV input voltage range(V)	160 1000					
MPPT voltage range(V)	200 900					
Start-up voltage(V)	160					
Max. PV input current per MPPT(A)	20/20			40/40/40		
Max. PV short-circuit current input per MPPT	25/25			50/50/50		
<b>Battery</b>						
Compatible battery type	Lithium-ion/Lead-Acid					
Rated battery voltage(V)	400					
Battery voltage range(V)	160 700					
Max. charging voltage(V)	700					
Max. charging/discharging current(A)	25			50		
Max. charging/discharging power(W)	6000	8000	10000	12000	15000	20000
Force wake up battery from PV function	YES					
<b>Grid</b>						
Rated AC voltage(V)	230/400					
Rated AC frequency(Hz)	50					
Rated AC output current(A)	9.1	12.2	15.2	18.2	22.8	30.3
Rated AC output power(W)	6000	8000	10000	12000	15000	20000
Max. AC input current(A)	9.1	12.2	15.2	18.2	22.8	30.3
Max. AC input power(W)	6000	8000	10000	12000	15000	20000
PF	0.99					
THDI	<3%					
Rated AC current of BYPASS relays(A)	90					
<b>UPS</b>						
Rated output power(W)	6000	8000	10000	12000	15000	20000
Rated output voltage(V)	230/400					
Rated output current(A)	9.1	12.2	15.2	18.2	22.8	30.3
Rated output frequency(Hz)	50					
Surge power, duration	2Pn, 0.5S					
Switching time	20ms					
Wave form	Sine wave					
THDV	<3%					
<b>Efficiency</b>						
Max. MPPT efficiency	99.0%					
European efficiency	95.5%					
Max. Charge/Discharge efficiency	96.0%					
<b>Protection</b>						
PV reverse polarity protection	YES					
Over current/voltage protection	YES					
Anti-islanding protection	YES					
AC Short-circuit protection	YES					
Leakage current protection	YES					
Grid monitoring	YES					
DC switch	YES					
Ingress protection	YES					
DC Surge protection Type III	YES					
AC Surge protection Type III	YES					
<b>General</b>						
Dimensions(W*H*D)	560*510*260mm/22*20.1*10.2inch					
Weight	43kg/94.8lbs					
Ingress protection rating	IP65					
Operating environment temperature range	-25 60°C					
Storage temperature range	-40 70°C					
Relative humidity	0 100%					
Display & Communication interface	Touch color screen, RS485/Wifi/CAN					
Warranty	5 years					
Cooling method	Natural cooling				FAN	
Topology	Transformer-less					
Altitude	<2000m					
Noise emission(typical)	<50dB					
<b>Standards &amp; Certification</b>						



SNA 3-6k Single Phase

SNA 5-6k Split Phase

**Luxpower has taken further steps to bring energy security to every home, on and off grid. Reorganize your energy at home, no more blackouts.**



# ECO HYBRID



## SNA 3-6k

With thousands of hybrid inverters & AC units installed around the world, Luxpower has stepped even further to bring power to every home, with or without grid power.

ECO Hybrid SNA 3-6k is now available for homes without grid. Inquire your local distributor to reorganize your power at home, no more blackouts.



# ECO HYBRID

## How it works

Your Reliable Energy Solution Partner


### / System Connection

Off-grid system is a good solution for the area where the grid power is unstable or in scarcity.

Advantage of solar power:

- Easy to install
- Efficient
- Cost-effective
- Environment-friendly


Can partially or entirely replace diesel generator. Flexible from 3 to 50kW.

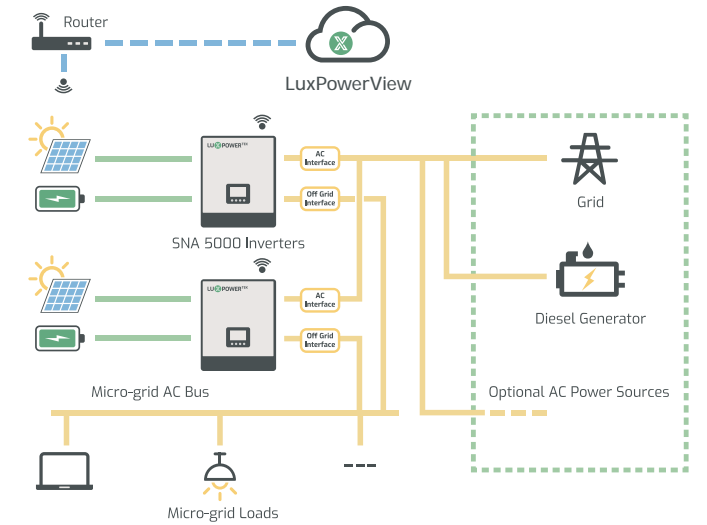

### / Working Mode

SNA 3-6kW series off-grid inverters can support the system to work as back-up power or a replacement for diesel generator. Since the inverter support paralleling function, the capacity of the system can range from 3kW to 50kW.

The inverter supports several working modes, including: Pure off-grid working mode: working as traditional off-grid inverters, can prioritize between using AC power or solar power. Hybrid working mode: working as a hybrid, supporting solar and utility jointly taking the load, can choose between self-consumption mode or charge priority mode.

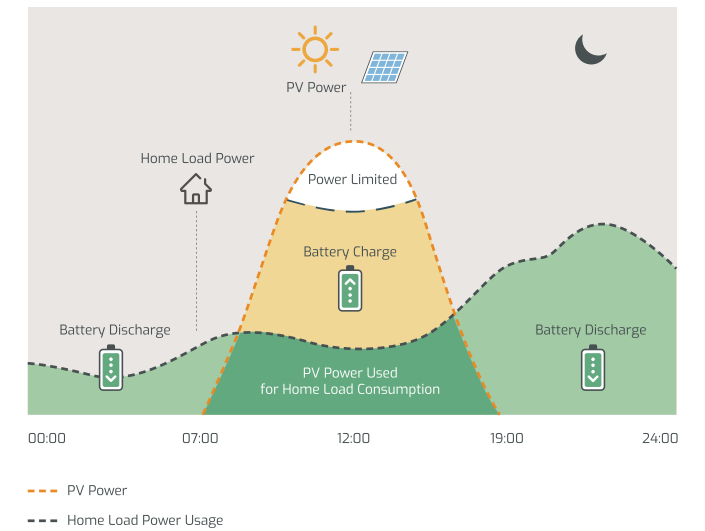



# SNA 3-6k Single phase

# Reclaim Your Power

- Intelligent off-grid & hybrid modes
- Off-grid seamless switching
- Wide PV input voltage range
- Great battery compatibility
- Single phase/Unbalanced 3-Phase
- Support up to 16pcs in parallel
  - Host inverter automatically generated to manage the entire system
- Separate generator port available



## SpecifiCation

INPUT (PV DC)	SNA 3000W	SNA 4000W	SNA 5000W	SNA 6000W
Max. PV array power(W)	6000 (3000/3000)	8000 (4000/4000)	8000 (4000/4000)	8000 (4000/4000)
Rated PV input voltage(V)	320			
Number of independent MPPT inputs	2			
PV input voltage range(V)	100 480			
MPPT voltage range(V)	120 385			
Start-up voltage(V)	100			
Max. PV input current per MPPT(A)	17/17			
Max. PV short-circuit current input per MPPT(A)	25/25			
<b>Battery</b>				
Compatible battery type	Lithium-ion/Lead-Acid			
Rated battery voltage(V)	48			
Battery voltage range(V)	38.4 60			
Max. charging/discharging current(A)	70	90	110	140
Max. charging/discharging power(W)	3000	4000	5000	6000
Recommend capacity of battery per inverter	>100AH	>200AH	>200AH	>200AH
Force wake up battery from PV function	YES			
Force wake up battery from Grid function	YES			
<b>Grid</b>				
Rated AC voltage(V)	230			
Rated AC frequency(Hz)	50/60			
Rated AC output current(A)	13.5	17.5	22	26.5
Rated AC output power(W)	3000	4000	5000	6000
Max. AC input current(A)	26	35	35	39.5
Max. AC input power(W)	6000	8000	8000	9000
PF	0.99			
THDI	<5%			
Rated AC current of BYPASS relays(A)	40			
<b>UPS</b>				
Rated output power(W)	3000	4000	5000	6000
Rated output voltage(V)	230			
Rated output current(A)	13.5	17.5	22	26.5
Rated output frequency(Hz)	50/60			
Surge power, duration	2Pn, <2S			
Switching time	<15ms@Single/ <30ms@Parallel			
Wave form	Sine wave			
THDV	3%			
<b>Efficiency</b>				
Max. MPPT efficiency	0.99			
Max. efficiency	0.93			
EU efficiency	/			
Max. charging efficiency	0.93			
Max. discharging efficiency	0.93			
<b>Protection</b>				
Over current/voltage protection	YES			
AC Short-circuit current protection	YES			
Grid monitoring	YES			
AC Surge protection Type III	YES			
Battery reverse polarity protection	YES			
<b>General</b>				
Dimensions(W*H*D)	330*505*135mm/13*19.9*5.3inch			
Weight	14.5kg/32lbs			
Ingress protection rating	IP20			
Operating environment temperature range	0 50°C			
Storage temperature range	-15 60°C			
Relative humidity	5% 95%			
Display & Communication interface	LCD+LED, RS485/Wi-Fi/CAN			
Warranty	2years			
Cooling method	FAN			
Topology	Transformer-less			
Altitude	<2000m			
Noise emission(typical)	<50dB			
<b>Standards &amp; Certification</b>				
IEC 62109-1, IEC 62109-2, IEC 61000				

# SNA 5-6k Split phase

- 240V/120V Output
- Intelligent off-grid & hybrid modes
- PV & AC take load jointly
- Wide PV input voltage range
- Single phase/Unbalanced 3-Phase.
- Paralleling up to 16 units
  - Host inverter automatically generated to manage the entire system
- Separate generator port available



## SpecifiCation

INPUT (PV DC)	SNA-US 5000	SNA-US 6000
Max. PV array power (W)	8000(4000/4000)	
Rated PV input voltage(V)	320	
Number of independent MPPT inputs	2	
PV input voltage range(V)	100 480	
MPPT voltage range(V)	120 385	
Start-up voltage(V)	100	
Max. PV input current per MPPT(A)	17/17	
Max. PV short-circuit current input per MPPT(A)	25/25	
<b>Battery</b>		
Compatible battery type	Lithium-ion/Lead-Acid	
Rated battery voltage(V)	48	
Battery voltage range(V)	38.4 60	
Max. charging/discharging current(A)	110	140
Max. charging/discharging power(W)	5000	6000
Recommend max. capacity of battery per inverter	>200AH	
Force wake up battery from PV function	YES	
Force wake up battery from Grid function	YES	
<b>Grid</b>		
Rated AC voltage(V)	110(P-N)/220(P-P); 120(P-N)/240(P-P)	
Rated AC frequency(Hz)	50/60	
Rated AC output current(A)	23A@220V/21A@240V	28A@220V/25A@240V
Rated AC output power(W)	5000	6000
Max. AC input current(A)	36.5A@220V/33.5A@240V	41A@220V/37.5A@240V
Max. AC input power(W)	8000	9000
PF	0.99	
THDI	<5%	
Rated AC current of BYPASS relays(A)	40	60
<b>UPS</b>		
Rated output power(W)	5000	6000
Rated output voltage(V)	110/220; 120/240	
Rated output current(A)	23A@220V/21A@240V	28A@220V/25A@240V
Rated output frequency(Hz)	50/60	
Surge power, duration	2Pn, <2S	
Switching time	<15ms @ Single/ <30ms @ Parallel	
Wave form	Sine wave	
THDV	<3%	
<b>Efficiency</b>		
Max. MPPT efficiency	99.0%	
Max. efficiency	93.0%	
Max. charging/discharging efficiency	93.0%	
<b>Protection</b>		
Over current/voltage protection(Y/N)	YES	
AC short-circuit current protection(Y/N)	YES	
Grid monitoring(Y/N)	YES	
AC Surge protection Type III	YES	
Battery reverse polarity protection(Y/N)	YES	
<b>General</b>		
Dimensions(W*H*D)	375*672*150mm/14.8*26.4*5.9inch	
Weight	14.5kg/33.1lbs	
Ingress protection rating	IP20	
Operating environment temperature range	0 50°C	
Storage temperature range	-15 60°C	
Relative humidity	5% 95%	
Display & Communication interface	LCD+LED, RS485/WI-FI/CAN	
Warranty	2 years	
Cooling method	FAN	
Topology	Transformer-less	
Altitude	<2000m	
Noise emission(typical)	<50dB	
<b>Standard &amp; Certification</b>		
IEC 62109-1, IEC 62109-2, IEC 61000, IEC 62040, EN 61000		





AC Retrofit

- LXP 3600 ACS / LXP 3600 SQPOD

DC Retrofit


- LSP 100k

# One Step to Retrofit Your Solar System

## / AC Retrofit

Retrofit an existing on-grid solar system to add battery storage.


It couldn't be easier than installing an LXP AC series inverter coupled on AC side with a battery pack. Installation of a Lux AC system should not affect existing solar systems or feed in tariffs.

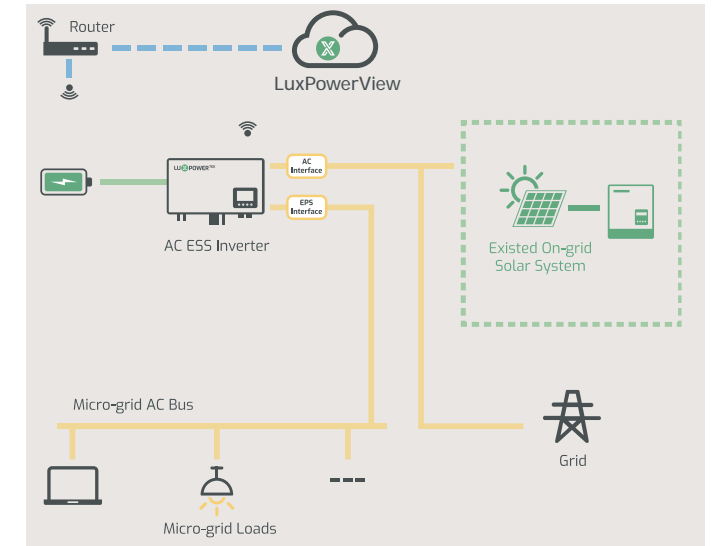

## / DC Retrofit

To retrofit an existing PV system by incorporating DC side coupling to create an energy storage system. With this enhanced storage system:

- It becomes compatible with batteries, enabling the addition of more PV panels, while also allowing the PV system to operate on a predefined schedule;
- By setting the charging/discharging timeline of the battery, it achieves an equivalent/similar effect as the Peak Shaving operating mode.

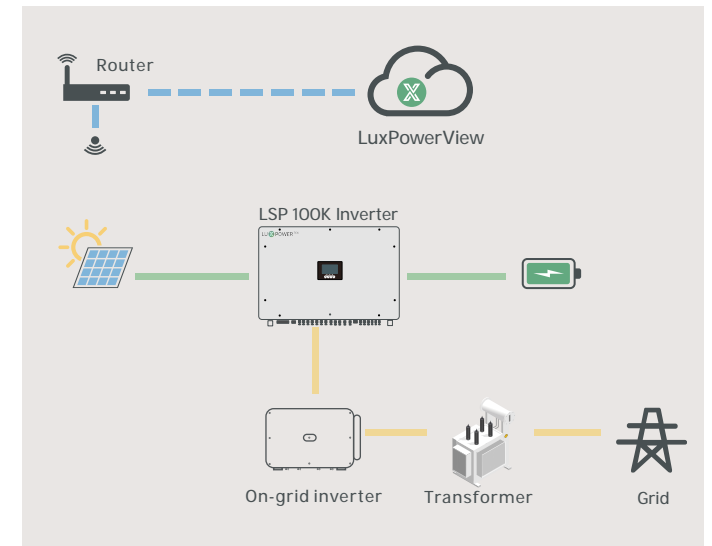

# LXP 3600 ACS



- Retrofit any on-grid system to energy storage system
- Intelligent charge feature
  - Weather forecast compensation
  - Update electricity price automatically
- Retrofit any on-grid/micro-grid system to energy storage system
- Economize charging/discharging schedule automatically
- Integrated UPS module
- On/off grid seamless switching under 20ms



NOTE:

Intelligent charge feature is only available in the UK for now, supporting regional customization

## SpecifiCation

<b>Battery</b>		LXP 3600 ACS/LXP 3600 SQPOD
Compatible battery type	Lithium-ion/Lead-Acid	
Rated battery voltage(V)	48	
Battery voltage range(V)	48-60	
Max. charging voltage(V)	60	
Max. charging/discharging current(A)	70	
Max. charging/discharging power(W)	3600	
Force wake up battery from Grid fuction(Y/N)	Y	
<b>Grid</b>		
Rated AC voltage(V)	230	
Rated AC frequency(Hz)	50/60	
Rated AC output current(A)	16	
Rated AC output power(W)	3600	
Max. AC input current(A)	26	
Max. AC input power(W)	6000	
PF	0.99(Adjustable from 0.8 leading to 0.8 lagging)	
THDI	< 3%	
Rated AC current of BYPASS relays(A)	40	
<b>UPS</b>		
Rated output power(W)	3600	
Rated output voltage(V)	230	
Rated output current(A)	16	
Rated output frequency(HZ)	50/60	
peak power, duration	4500W, 30S	
Switching time	20ms	
Wave form	Sine wave	
THDV	< 3%	
Parallel capacity	6	
<b>Efficiency</b>		
Max. efficiency	97.3%	
EU efficiency	97.0%	
Max. charging efficiency	94.5%	
Max. discharging efficiency	94.5%	
<b>Protection</b>		
Over current/voltage protection	YES	
Anti-islanding protection	YES	
AC Short-circuit current protection	YES	
Grid monitoring	YES	
AC Surge protection Type III	YES	
<b>General</b>		
Dimensions(W*H*D)	650*440*220mm/25.6*17.3*8.6inch	
Weight	15.6kg/34.4lbs	
Ingress protection rating	IP65	
Operating environment temperature range	-25-60°C	
Storage temperature range	-40-65°C	
Relative humidity	0-95%	
Display & Communication interface	LCD, RS485/Wi-Fi/CAN	
Warranty	5 years	
Cooling method	Natural	
Topology	Transformer-less	
Altitude	2000m	
Noise emission(typical)	< 25dB	
DC connector(VP-D4/MC4(Optional))	/	
AC connector(AC connector)	AC connector	
<b>Standards &amp; Certification</b>		
IEC 62109, IEC 62040, EN 61000, VDE-AR-N 4105, AS4777.2, EN50549-1+NC RFG, G98		






# LXP 3600 SQPOD



- Modular expansion – link up to 6 units together
- Number of batteries - Min, 1 Max. 8 (5.12kWh for each battery)
- Retrofit any on-grid/micro-grid system to energy storage system
- EPS (Emergency Power Supply) functionality
- Free online monitoring platform
- Weather Compensation smart charge feature
- Multiple Works with Octopus auto charge packages
  - Suggesting 40kW for each machine, can be more.

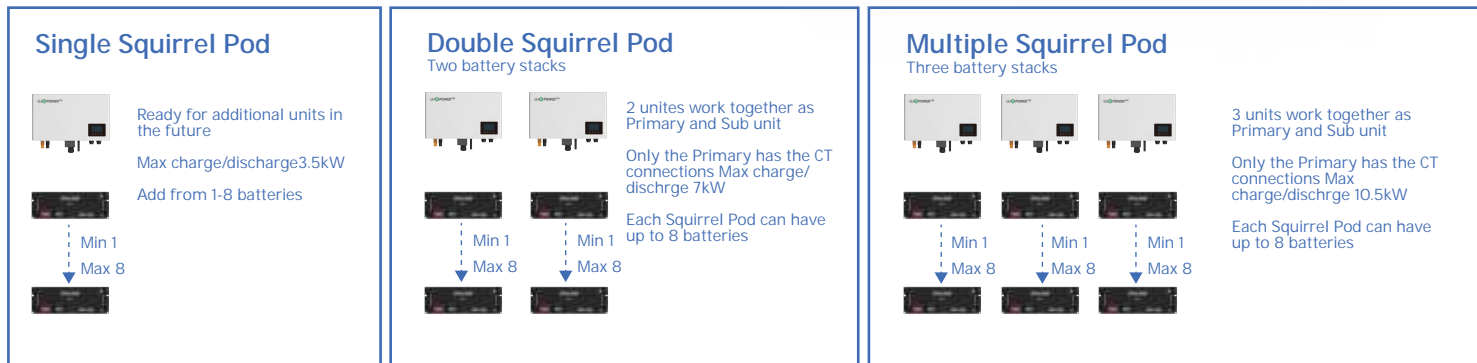

## Lux Power Battery Storage Agile Auto Charge

Luxpower and Infinity Innovations Ltd. have developed an Agile Auto Charge (AAC) to allow automatic off-peak charging using the cheapest rates available. This is a Beta system and therefore reacts to data provided by Octopus. Lux Power has no involvement or responsibility for the content or timing of the information provided. It is recommended that you read the Octopus Blog regarding all systems approved as compatible with Octopus.

<https://octopus.energy/blog/works-with-octopus/>

The AAC analyses the time and prices of the electricity information published by Octopus Energy and ranks the information by price. You can therefore just input the number of charge periods you want to use, and the system will automatically charge using only the cheapest periods.

### Simple to Programme

Agile Auto Charge will appear on your Luxpower Portal once activated by Infinity Innovations Ltd. Simply select the quantity of 30-min charge periods you require for Night or Day charging and press save!

### Night Charge - From midnight to 6am.

Select the desired number of charge periods, and your system will automatically adjust to charge during periods when prices are at their lowest.

### Day Charge - From 12 noon to 4 pm.

This will allow you to top-up your batteries ready to get through the more expensive On-Peak periods.

### Blocking Discharge

You can also set periods where the batteries can charge but will not discharge. For example, block discharging from midnight to 6am and your batteries will charge using only the cheapest rates but will not discharge. So you can set all heavy usage items - washing machines, dishwashers, EV charging etc. to also run at night without emptying your batteries. Using this function, you can ensure your batteries are 100% charged ready to cover your house load at 6am.




# LSP 100k

Thanks to LSP 100k, it's now easy

To retrofit an existing PV system by incorporating DC side coupling to create an energy storage system. With this enhanced storage system:


- It becomes compatible with batteries, enabling the addition of more PV panels, while also allowing the PV system to operate on a predefined schedule.
- By setting the charging/discharging timeline of the battery, it achieves an equivalent/similar effect as the Peak Shaving operating mode.

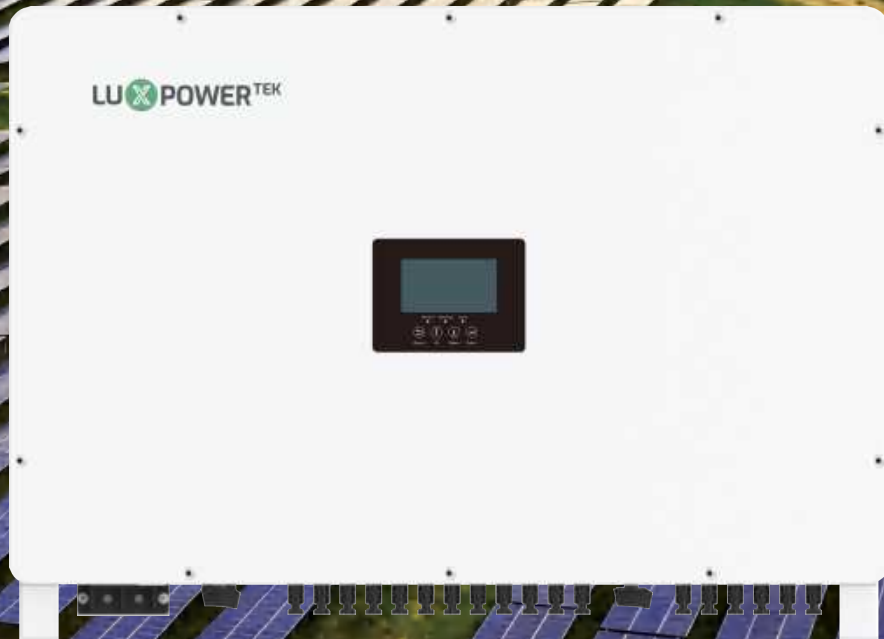

- Max. 200kW PV input, 100kW PV output
- Retrofit on-grid system to hybrid system (energy storage)
- DC-coupling, 24 MPPT inputs and 12 MPPT outputs
- Free & handy monitoring platform on PC (Web)
- Advanced power management logic
- Waterproof Touch screen
- Equipment Protection Level: IP65

## SpecifiCation

INPUT (PV DC)		LSP 100k
Max. input power(kW)		200
Max. input voltage(V)		1100
Rated PV input voltage(V)		630
MPPT voltage range(V)		300 1000
Start-up voltage(V)		330
Max. short-circuit per MPPT(A)		33
Max. current per MPPT input(A)		26
Number of MPPT tracks		12
Number of input strings		24
Battery		Lead-acid/Lithium-ion
Type		Lead-acid/Lithium-ion
Max. charging/discharging power(kW)		100
Voltage range(V)		300 700
Max. charging/discharging current(A)		200
Max. charging/discharging efficiency		98.10%
PV output		
DC-DC output rated power(kW)		100
Normal output voltage(V)		630
Output voltage range(V)		500 1000
Max. output current(A)		20
Output strings		12
Output tracks		12
Protection		
DC reverse-polarity protection		Yes
DC surge arrester		Type II
General		
Dimensions(W*H*D)		1015*680*310mm/39.9*26.8*12inch
Weight(with mounting plate)		120Kg/264.5lbs
Protection degree rating		IP65
Topology		Transformer-less
Cooling method		Air cooling
Relative humidity		0% 100%
Operating environment temperature range		-25°C 60°C
Connector(PV input and Output)		MC4
Battery connector		Screw
Altitude		<4000m
Warranty		5 years
Display		Touch color screen, LED+LCD
Communication interface		RS485/CAN/Wi-Fi
Standards & Certifications		
		EN 62109-1 / -2
		IEC 62109-1 / -2

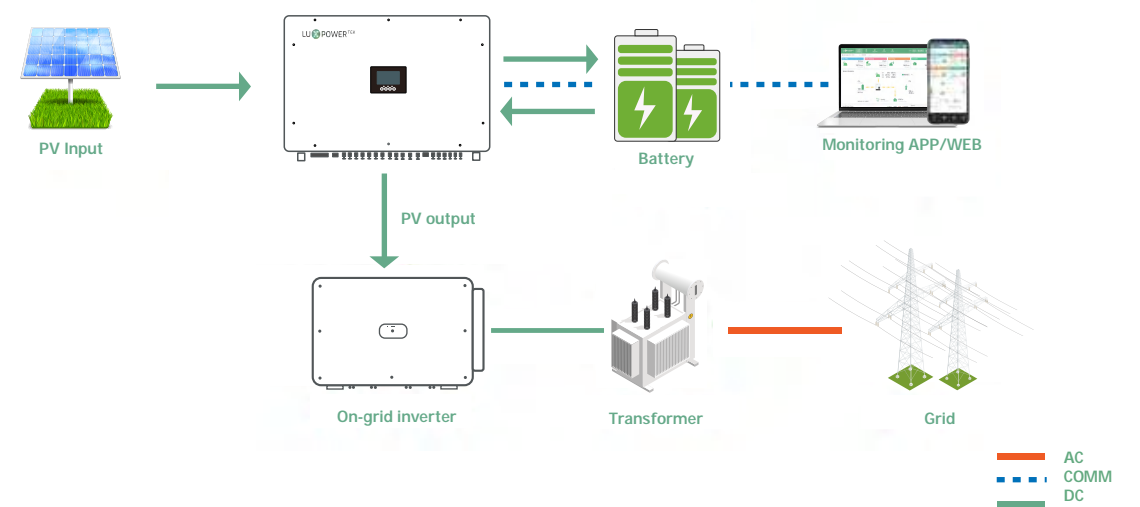



MONITORING  
APP/WEB

LUXPOWER<sup>TEK</sup>

# Top Energy Storage App

# Intelligent Power Management System

For APP Download



Android



IOS




Luxpower has dedicated to making things easier since day 1. Thanks to the greatly accessible monitor and manager, all needs from users, installers, and distributors can be met.



5th floor, A Zone Of Building 11.  
Hengchangrong High-Tech Industrial Park,  
Huangtian Community, Hangcheng Street,  
Bao'an District Shenzhen, China, 518100




+86 0755 8520 9056  
www.luxpowertek.com  
info@luxpowertek.com

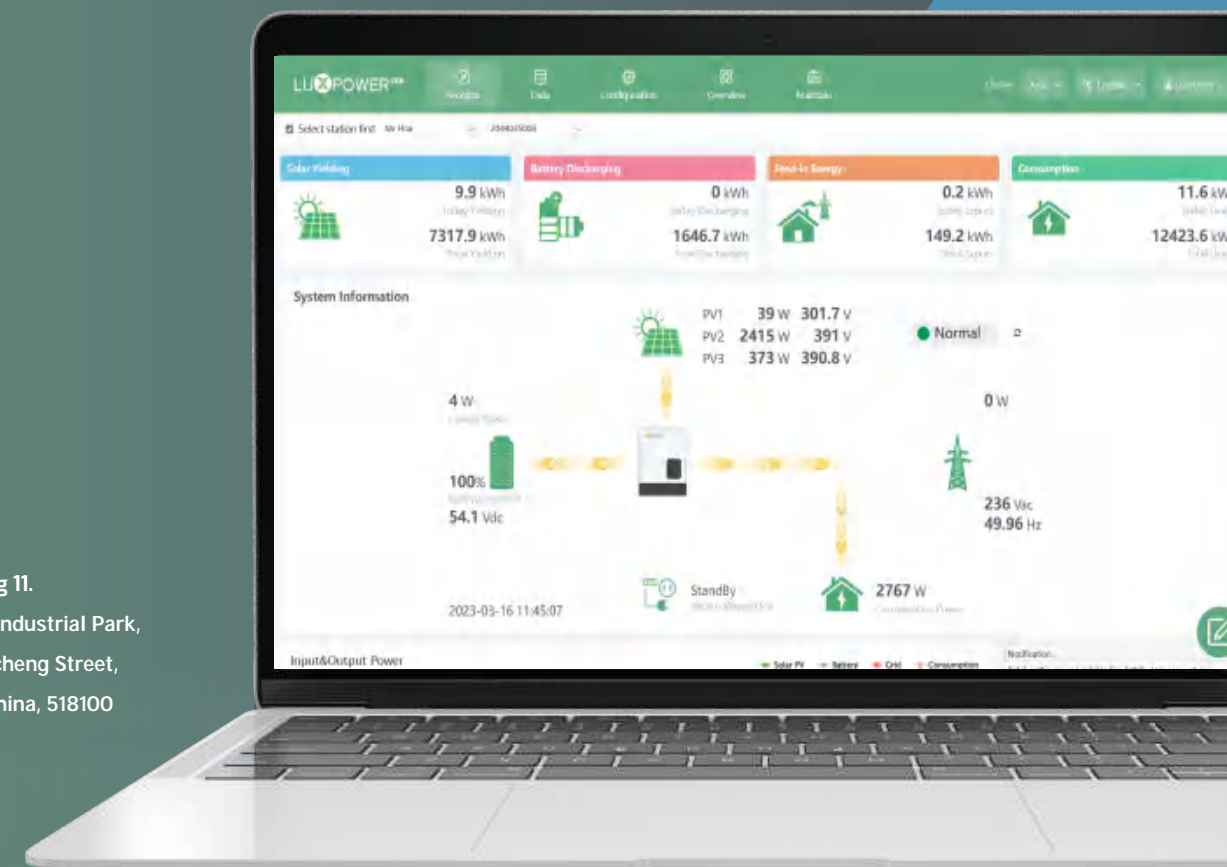



# Certificates

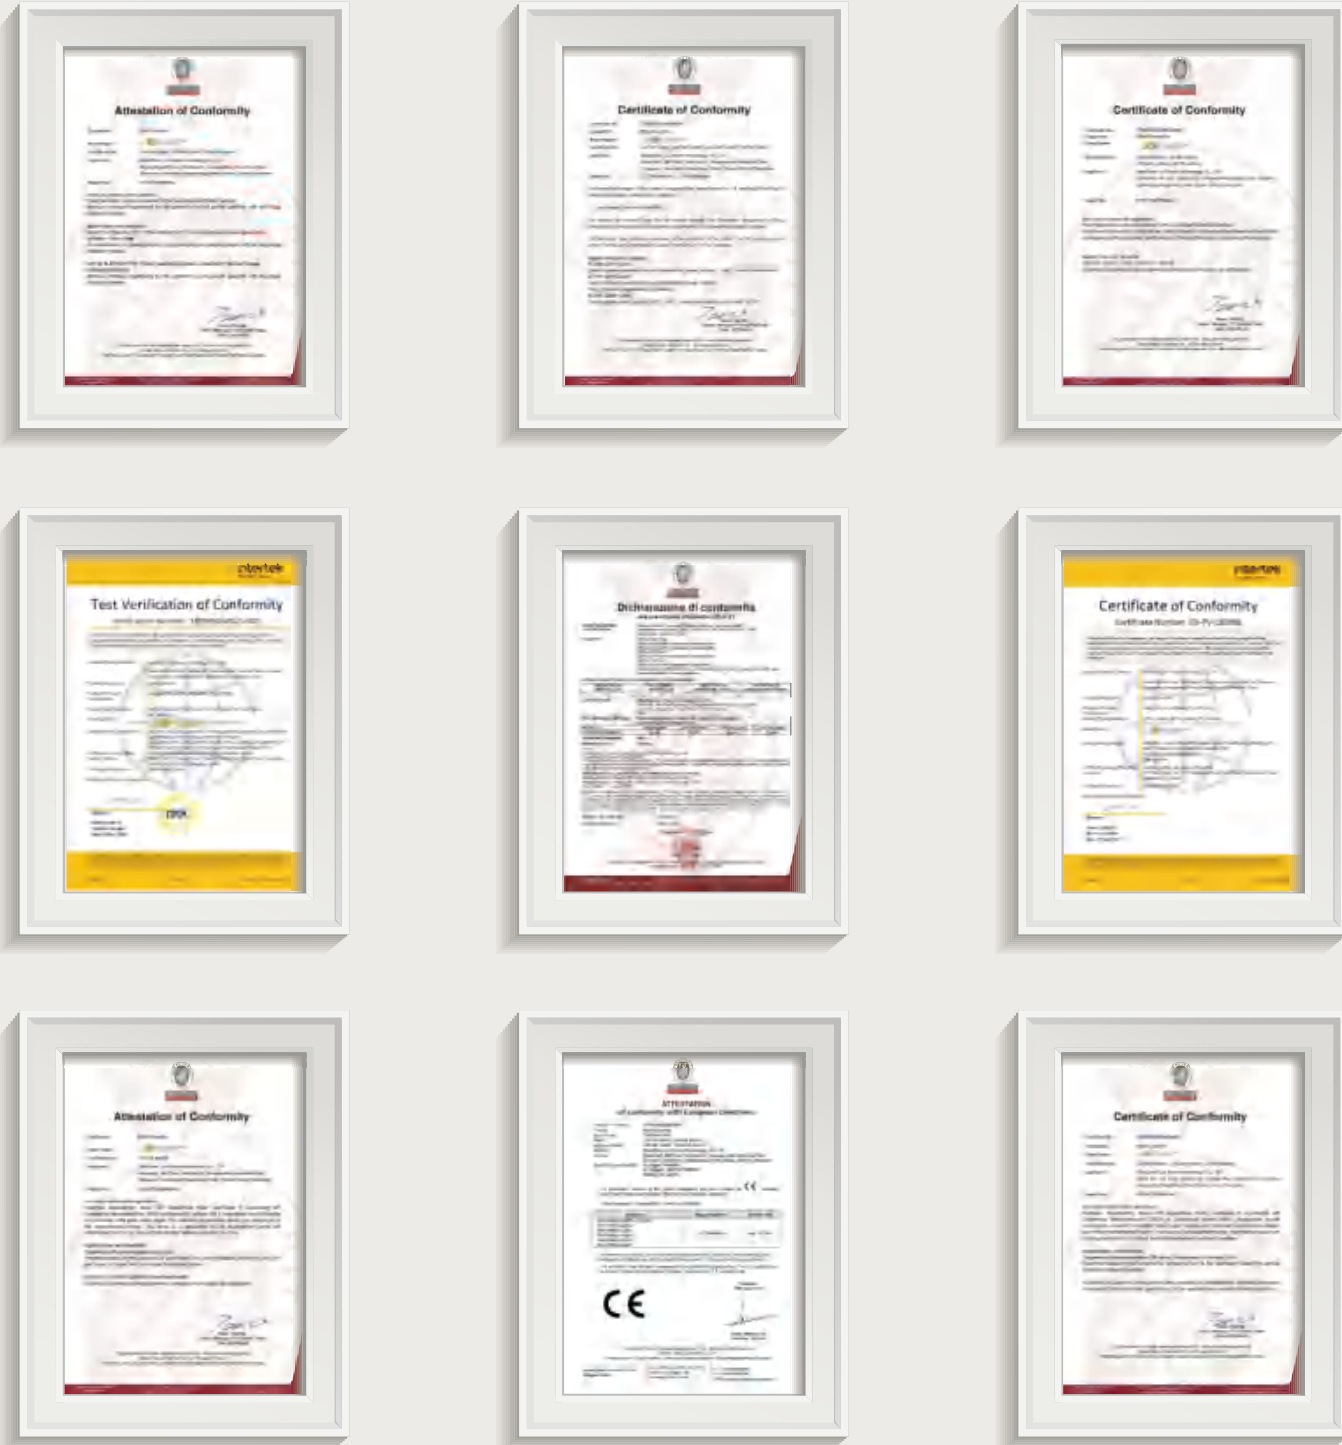

Your Reliable  
Energy Solution  
Partner